


CAST-IN-PLACE CONCRETE

Strength : 20 MPa at 28 days
Aggregate : 25 mm max.
Slump : 75 mm max.

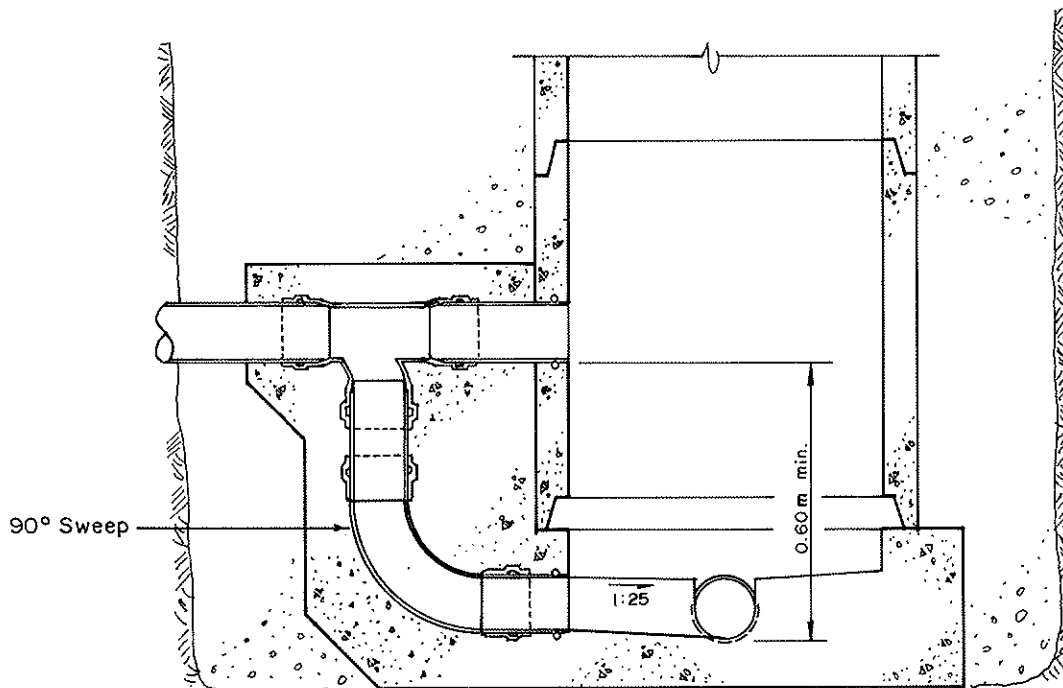

SECTION

NOTES:

1. Minimum 150 mm concrete cover over all fittings.
2. See std. dwg. no. 303 for typical manhole details and pertinent notes.



MUNICIPALITY OF CENTRAL SAANICH

TITLE:

OUTSIDE DROP MANHOLE

STD. DWG. No.

304

Approved;

Date; JULY 1986

Scale; N.T.S.

Rev.