



h	b
1.0 m	0.75 m
1.5 m	0.90 m
2.0 m	1.10 m
2.5 m	1.35 m

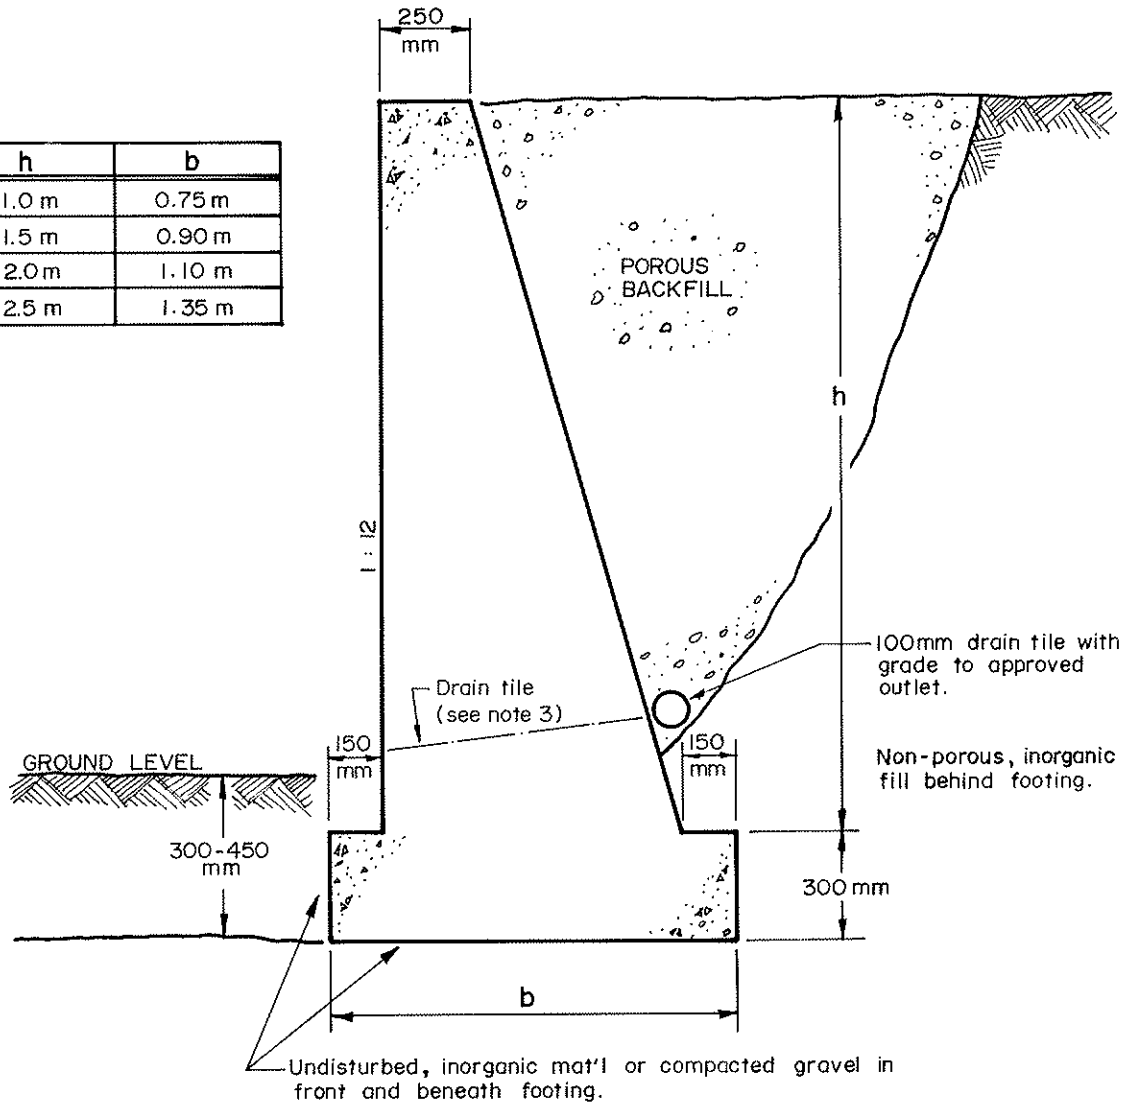

NOTES:

1. Construction joints at 9.0m centers. Joint will have a tongue and groove key and will be covered with a strip of waterproof membrane at the back of the wall.
2. If vehicular loads near top of wall, use the "b" dimension of a wall which is 0.5 meters higher
3. Alternately, 100mm drain tiles may be installed at 3 m centers.
4. Standard sidewalk handrail shall be installed where required. (see std. dwg. no. 518)



MUNICIPALITY OF CENTRAL SAANICH

TITLE:
CONCRETE GRAVITY RETAINING WALL

STD.DWG.No.
514

Approved;

Date; JUNE 1986

Scale; N.T.S.

Rev.